

Scope of the art R&S® Scope Rider Handheld digital oscilloscope

Lab performance in a rugged
and portable design

1 60 MHz to 500 MHz

1 Isolated, CAT IV

3
year
warranty

2 MIN
2 be
sure.
2-minutes.com



Invest 2 minutes
and you'll never
look back.


ROHDE & SCHWARZ

R&S® Scope Rider

Experience our handheld scope for 2 minutes and you'll never look back

In the lab

Lab performance in a rugged and portable design – the perfect multipurpose tool for the lab or in the field.

Superior performance

- ▮ 60 MHz to 500 MHz with 5 Gsample/s sampling rate
- ▮ 50 000 waveforms per second
- ▮ 10-bit A/D converter
- ▮ 2 mV/div to 100 V/div
- ▮ Up to 200 V offset range
- ▮ 33 automatic measurement functions

8 instruments in one handheld package

- ▮ Lab performance oscilloscope
- ▮ Logic analyzer
- ▮ Protocol analyzer
 - I²C/SPI, UART, CAN/LIN, CAN-FD, SENT
- ▮ Data logger
- ▮ Digital multimeter ¹⁾
- ▮ Spectrum analyzer **New**
- ▮ Harmonics analyzer **New**
- ▮ Frequency counter **New**

7", 800 × 480 pixel capacitive touch display

> 4 h battery life

Switch between all instrument modes

One-touch documentation: easily save screenshots and measurements



¹⁾ Additional multimeter channel in two-channel model.

**Wireless
remote control**

In the field

CAT IV 600 V/CAT III 1000 V:
galvanic-insulated floating channels

Rugged, dust and
water resistant
housing

Capacitive touch and keypad operation

- ▮ Full operation via touch panel or keypad
- ▮ See more with a 7" color display
- ▮ Easy parameter adjustment with multifunction wheel
- ▮ Large buttons for use with gloves

Outstanding protection

- ▮ Maximum safety in all environments:
CAT IV 600 V/CAT III 1000 V
- ▮ IP51 housing that meets military
environmental requirements
- ▮ Nonslip and impact resistant
rubberized surface

Excellent connectivity and much more

- ▮ Wireless LAN and Ethernet for web-based
remote control and quick data access
- ▮ Finish faster with one-touch documentation
- ▮ MicroSD card and USB device/host support
- ▮ More than 4 hours of battery power

Multifunction
wheel

Unmatched
connectivity:
USB, Ethernet and
wireless LAN

Large buttons,
can be used
with gloves



Superior performance: a lab oscilloscope in a handheld package

- 60 MHz to 500 MHz at up to 5 Gsample/s
- High-speed acquisition system with history mode
- 10 bit A/D converter
- Excellent sensitivity: 2 mV/div to 100 V/div
- Up to 200 V offset compensation range
- 33 automatic measurement functions
- Deep zoom with 500 ksample acquisition memory



Lab oscilloscope performance

When debugging embedded devices in the lab or analyzing complex problems in the field, the R&S®ScopeRider offers the performance and capabilities of a lab oscilloscope as well as the form factor and ruggedness of a battery-operated handheld device.

Small sensor signals can be analyzed with an excellent vertical sensitivity of 2 mV/div. Triggering on protocol events and decoding protocol data enables convenient debugging of digital control signals. A digital trigger system provides the best trigger sensitivity available in a handheld oscilloscope, and 14 trigger types give the flexibility required to capture exactly the right signal. With 33 automatic measurement functions, the R&S®ScopeRider delivers the capabilities of a lab oscilloscope when analyzing signal parameters.



Safe measurements on power electronics

Analyzing modern electric drive systems requires measuring motor voltages and currents while analyzing digital control signals. Safety is a key consideration for such measurements.

The R&S®ScopeRider offers up to four isolated input channels with CAT IV 600 V rating that allow measurements on high-voltage electronics without compromising safety. Digital control signals can be analyzed with the 8-bit logic interface that is isolated from the analog input channels. The protocol trigger and decode capability of the R&S®ScopeRider is unprecedented in handheld oscilloscopes and provides direct display of decoded messages.

High-speed acquisition system with deep history: never miss rare faults again

Capturing and analyzing rare anomalies in electric signals is a typical use case when debugging electronic systems. With an acquisition rate of up to 50 000 waveforms per second – more than 1000 times faster than conventional handheld oscilloscopes – the R&S®ScopeRider sees signals other scopes miss. Rare faults in signals can be reliably captured and analyzed.


In history mode, the instrument automatically stores up to 5000 waveforms in a separate history buffer. At any point in time, acquisition can be stopped and any waveform in the history buffer can be analyzed using the full oscilloscope functionality. One-time anomalies that would have been missed by a conventional handheld oscilloscope can now be analyzed in detail.



The high-speed acquisition system of the R&S®ScopeRider captures up to 50 000 waveforms/s and uncovers rare and unexpected signal anomalies.


Debugging power in your hand: eight instruments in one portable design

Oscilloscope, logic and protocol analyzer, data logger, digital multimeter, spectrum analyzer, harmonics analyzer and frequency counter: With the power of eight instruments and dedicated operation modes for XY operation, roll mode and mask testing, the R&S®Scope Rider provides the capabilities and the flexibility needed for debugging all kinds of electronic systems.

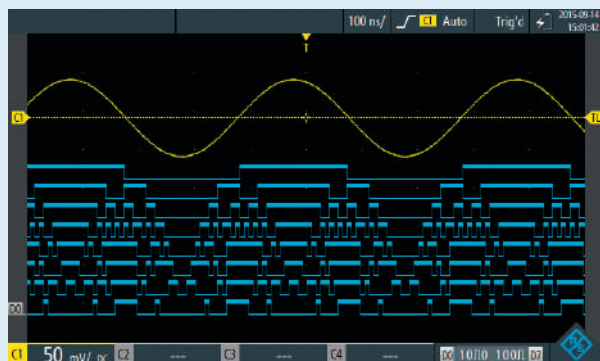


Logic analyzer

Motor drive measurements often require up to four analog measurement channels with no channel free for monitoring digital control interfaces. The digital logic probe (MSO) of the R&S®Scope Rider features eight additional digital inputs for analyzing control signals, time-correlated to the analog channel signals. With 250 MHz bandwidth, 1.25 Gsample/s sampling rate and configurable thresholds, it adapts to almost any digital interface.

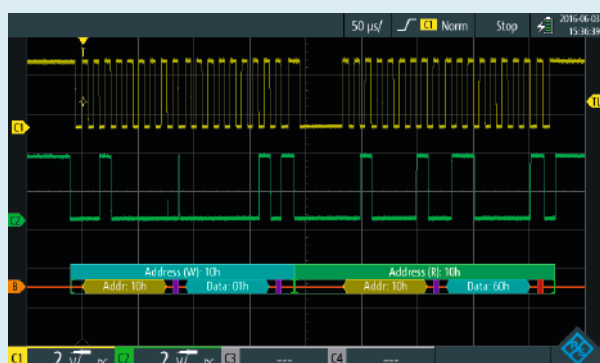


Protocol analyzer

Serial protocols are often used to transmit control signals. The R&S®Scope Rider is the first galvanically isolated, handheld digital oscilloscope that features protocol triggering and decoding capability for in-depth troubleshooting. Targeted triggering on protocol events and protocol data enables users to selectively acquire relevant events, data and signals. Since the R&S®Scope Rider supports serial protocols (I²C/SPI, UART, CAN/LIN, CAN-FD, SENT), it can be used in conventional lab and mobile applications as well as in the automotive segment.

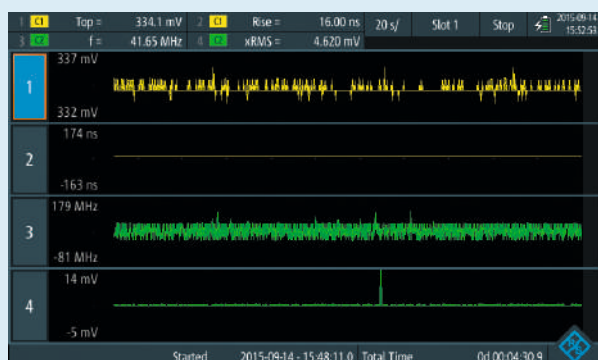


Data logger

Sporadic sensor signal faults or rare glitches in a power supply can cause complex system failures without any obvious indication of the root cause. The long-term data logger of the R&S®Scope Rider makes it possible to monitor up to four key measurements at a speed of 1, 2 or 5 measurements per second to uncover such rare failures. The large memory of 2 Msample per channel allows more than 23 days of log duration. The statistics display provides information about minimum and maximum values with exact time.

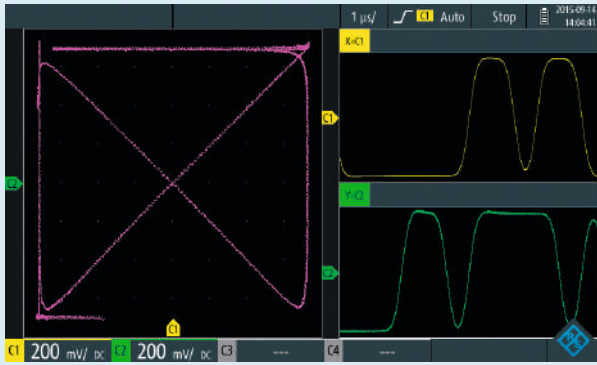

XY operation mode

Relative phases between two signals can be easily measured with the dedicated XY mode that also shows the individual time signals.

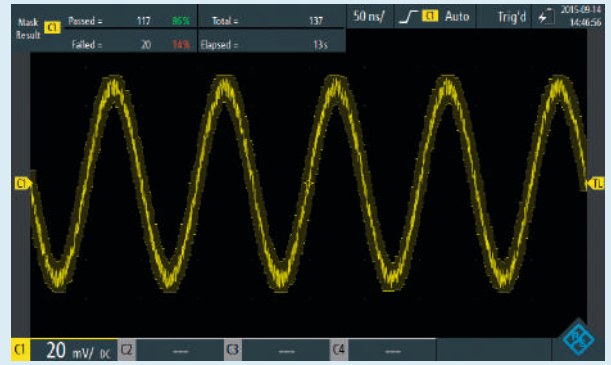

Mask test mode

The mask test mode shows pass and fail statistics and makes it easy to set up masks based on test signals.



Digital multimeter

The two-channel variant R&S®RTH1002 features a dedicated, isolated digital multimeter with 10 000 count resolution. Measurement functions include V DC, V AC, V AC + V DC, resistance, continuity and capacitance as well as current or temperature if suitable shunts are used.

The four-channel variant R&S®RTH1004 features a digital voltmeter on each input channel. Statistics information shows minimum, average and maximum values with corresponding time stamps.

Select the instrument you need at the push of a button.

Simply better – in the lab and in the field

Capacitive touch and keypad operation: intuitive to use

- Full instrument control via touch panel or keypad
- Excellent readability and crystal clear signals:
7", 800 × 480 pixel capacitive touch display
- Multifunction wheel for easy parameter adjustment
- Large keys for use with safety gloves

Wireless LAN or Ethernet: easy remote control within a web browser

An integrated wireless LAN module or the Ethernet port allow the R&S®ScopeRider to be remotely controlled directly from the web browser. The touch interface of the R&S®ScopeRider is accessible in the web browser. All settings can be adjusted on the PC. Image compression ensures that the screen image is rapidly updated.

User interface designed to customer needs

Making use of the latest display technology, the R&S®ScopeRider provides a crystal clear signal display with a high-resolution capacitive touch color display. Oscilloscope settings can easily be adjusted on the screen while dedicated keys provide quick access to important oscilloscope functions. A central multifunction wheel allows quick adjustment of settings such as the trigger level or the vertical position of each channel. Fully controllable via the keypad, the oscilloscope can also be used with gloves if safety or weather require them. Easy-to-understand diagrams explain important settings such as the trigger mode, the automatic measurement functions or the channel settings.

Easy documentation of measurement results

Simplify your measurement documentation with documentation project directories on the microSD card or USB flash drive. Screenshots, measurement results and settings files are saved with a single button press in the selected project directory. Data can be easily accessed and downloaded using the web browser interface.

Up to 32 Gbyte of data storage capability

The R&S®ScopeRider supports microSD cards with up to 32 Gbyte storage capability, making it possible to save virtually an unlimited amount of data, screenshots or settings files on the instrument.



Wireless LAN or Ethernet: easy remote control for safety critical measurements



The image shows a man in a blue shirt interacting with a tablet. The tablet screen displays a waveform and a control interface. In the background, a server rack is visible, with a handheld digital oscilloscope (R&S Scope Rider) placed on a shelf. A yellow warning sign with a black lightning bolt is overlaid on the left side of the image, indicating a safety hazard. The scene is set in a server room with blue lighting.

An integrated wireless LAN module and web server allows easy remote control of the R&S®Scope Rider. The waveform display and user interface of the R&S®Scope Rider are directly available in the web browser; all settings can be changed on the screen.

With no software installation required, the R&S®Scope Rider can be controlled from almost every portable device such as a laptop, a tablet or even a mobile phone.

Built for your work environment: outstanding protection and ruggedness

- Isolation of all analog input channels
- Rated for measurements in CAT III 1000 V/ CAT IV 600 V environments
- IP 51 housing for harsh environments
- Nonslip and impact resistant rubberized surface

Maximum safety in all environments

Troubleshooting in industrial environments presents many challenges. Debugging electronic systems at a modern production site can require analyzing low-voltage digital signals, as well as verifying the power quality of a 380 V supply, or testing the power efficiency of electrical drives. The R&S®ScopeRider CAT IV 600 V rating provides this level of flexibility in a single device.

Highest sensitivity and safe high-voltage measurements at the same time


Double isolation of all input channels, the multimeter channel¹⁾ and the digital interfaces, including the logic channel (MSO), make it possible to measure in mixed circuits with different ground levels. This reduces the risk of accidental short circuits and enables safe measurements in high-voltage electric installations. Sensitive analog or digital control circuits can be measured without compromising safety.

IP51 housing – tested in line with military environmental standards


Thanks to the passive cooling concept, the handheld oscilloscope feature a sealed IP51, dust and drip-proof housing. Tested in line with military environmental standards, the R&S®ScopeRider provides the ruggedness that is needed for harsh environments. A rubberized surface with large keys makes it easy to use in difficult environments.

¹⁾ Separate multimeter channel only in two-channel models.

Double insulation for maximum safety

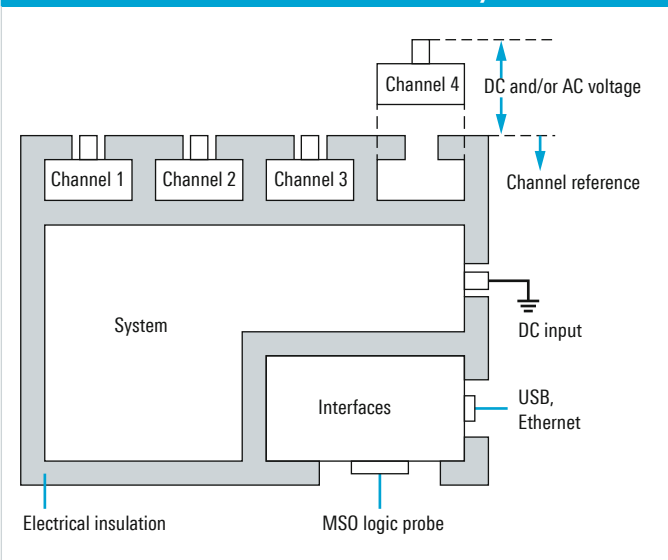

Overview of measurement categories CAT 0 to CAT IV

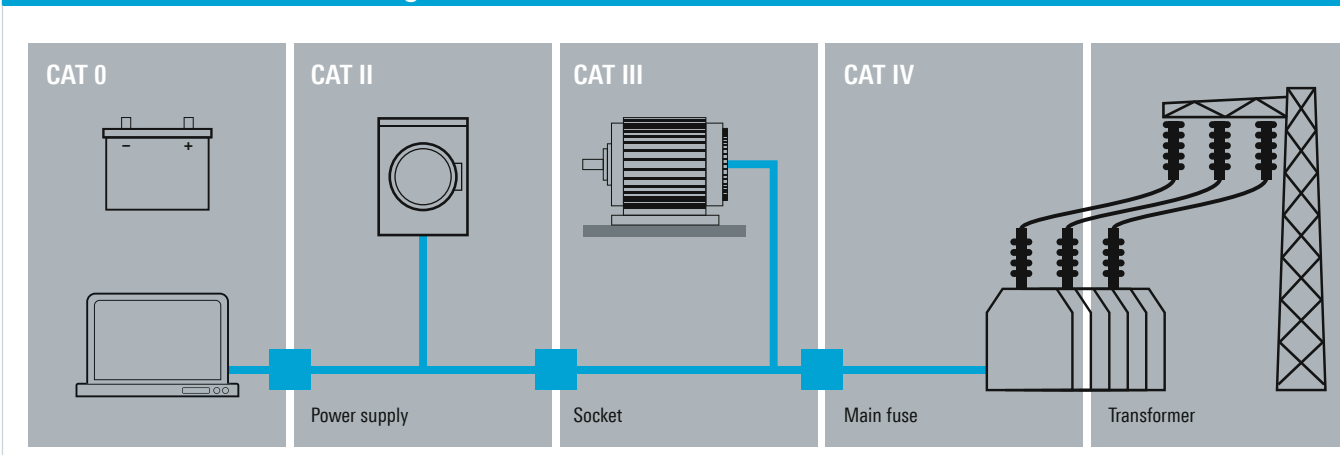

Wide range of probes and accessories

The R&S®ScopeRider comes with all essential accessories as standard:

- 500 MHz, 10:1, 600 V CAT IV voltage probe for each input channel
- Power supply with plugs for EU, GB and US
- Battery pack
- Soft handle

In addition, a wide range of accessories is available:

- 500 MHz, 100:1, voltage probes
- Replacement accessory set for voltage probes
- Extended accessory set for voltage probes
- Current probes
- 12 V/24 V car adapter
- Soft carrying bag
- Hard shell protective carrying bag
- Battery charger



R&S®ScopeRider accessories.

Specifications in brief

Specifications in brief		
Vertical system		
Input channels	2-channel models	2 oscilloscope channels, 1 digital multimeter
	4-channel models	4 oscilloscope channels
Maximum input voltage	BNC inputs	CAT IV 300 V (RMS), 424 V (V _p)
	with probe R&S®RT-ZI10 or R&S®RT-ZI11	CAT IV 600 V, CAT III 1000 V
Input sensitivity		2 mV/div to 100 V/div
Vertical resolution of overall system		9 bit
Acquisition and horizontal system		
Maximum realtime sampling rate	1/2/4 channels active	5/2.5/1.25 Gsample/s
Acquisition memory	1/2/4 channels active	500/250/125 ksample/channel
Realtime waveform acquisition rate	max.	50 000 waveforms/s
Timebase range		1 ns/div to 500 s/div
Logic analyzer (MSO) functionality (optional: R&S®RTH-B1)		
Input channels/memory depth		8 logic channels/125 ksample
Bandwidth/sampling rate		250 MHz/1.25 Gsample/s
Digital trigger system		
Trigger modes		auto, normal, single
Trigger types	advanced trigger types optional (R&S®RTH-K19)	14 trigger types
Automatic oscilloscope measurements		
Automatic measurements		33 measurement functions
Mask testing		
Mask definition		tolerance tube
Actions on violation		none, beep, stop
History and segmented memory (optional: R&S®RTH-K15)		
Number of segments		up to 5000
Protocol triggering and decoding		
Supported protocols	optional: R&S®RTH-K1, R&S®RTH-K2	I ² C, SPI, UART/RS-232/RS-422/RS-485
Data logger		
Number of simult. logging channels		4
Measurement speed		1/2/5 measurements/s
Memory depth		2 Msample per logging channel
Digital voltmeter/digital multimeter		
Resolution	2-channel version (digital multimeter)	10 000 counts
	4-channel version (digital voltmeter)	999 counts
Voltage and current	current with optional current probe or shunt	DC, AC, AC + DC
Temperature		with PT100 temperature probe
Resistance, continuity, diode test, capacity, frequency		only 2-channel version
General data		
Dimensions	W × H × D	201 mm × 293 mm × 74 mm (7.91 in × 11.54 in × 2.91 in)
Weight	with battery	2.4 kg (5.3 lb) (nom.)
IP rating		IP51, in line with IEC60529
Screen		7.0" LC TFT 800 × 480 pixel color display
Interfaces		USB host, USB device, LAN, wireless LAN (optional)

Ordering information


Designation	Type	Order No.
Choose your R&S®ScopeRider base models		
Handheld Oscilloscope, 60 MHz, 2 channels, CAT IV, DMM	R&S®RTH1002	1317.5000k02
Handheld Oscilloscope, 60 MHz, 4 channels, CAT IV	R&S®RTH1004	1317.5000k04
Choose your bandwidth upgrade		
Upgrade of R&S®RTH1002 oscilloscopes to 100 MHz bandwidth	R&S®RTH-B221	1325.9717.02
Upgrade of R&S®RTH1002 oscilloscopes to 200 MHz bandwidth	R&S®RTH-B222	1325.9723.02
Upgrade of R&S®RTH1002 oscilloscopes to 350 MHz bandwidth	R&S®RTH-B223	1325.9730.02
Upgrade of R&S®RTH1002 oscilloscopes to 500 MHz bandwidth	R&S®RTH-B224	1326.0571.02
Upgrade of R&S®RTH1004 oscilloscopes to 100 MHz bandwidth	R&S®RTH-B241	1326.0588.02
Upgrade of R&S®RTH1004 oscilloscopes to 200 MHz bandwidth	R&S®RTH-B242	1326.0594.02
Upgrade of R&S®RTH1004 oscilloscopes to 350 MHz bandwidth	R&S®RTH-B243	1326.0607.02
Upgrade of R&S®RTH1004 oscilloscopes to 500 MHz bandwidth	R&S®RTH-B244	1326.0613.02
Choose your options		
Mixed Signal Upgrade for non-MSO models, 250 MHz	R&S®RTH-B1	1325.9981.02
I ² C/SPI Serial Triggering and Decoding	R&S®RTH-K1	1325.9969.02
UART/RS-232/RS-422/RS-485 Serial Triggering and Decoding	R&S®RTH-K2	1325.9975.02
CAN/LIN Serial Triggering and Decoding	R&S®RTH-K3	1333.0550.02
CAN-FD Serial Triggering and Decoding	R&S®RTH-K9	1326.3829.02
SENT Serial Triggering and Decoding	R&S®RTH-K10	1326.3835.02
History and Segmented Memory	R&S®RTH-K15	1326.1803.02
Spectrum Analysis	R&S®RTH-K18	1333.0680.02
Advanced Triggering	R&S®RTH-K19	1326.0642.02
Frequency Counter	R&S®RTH-K33	1333.0696.02
Harmonics Analysis	R&S®RTH-K34	1333.0673.02
Wireless LAN, all countries except US and Canada	R&S®RTH-K200	1326.0620.02
Wireless LAN, for US and Canada only	R&S®RTH-K200US	1332.9890.02
Web Interface Remote Control	R&S®RTH-K201	1326.0636.02
Choose your probes		
Passive Probe, 500 MHz, isolated, 10:1, 10 M Ω , 12 pF, 600 V CAT IV, 1000 V CAT III	R&S®RT-ZI10	1326.1761.02
Passive Probe, 500 MHz, isolated, 100:1, 100 M Ω , 4.6 pF, 600 V CAT IV, 1000 V CAT III, (3540 V CAT I)	R&S®RT-ZI11	1326.1810.02
Passive Probe (laboratory model), 500 MHz, isolated, 10:1, 10 M Ω , 11 pF, 300 V CAT III	R&S®RT-ZI10C	1326.3106.02
Set 2 $\times$ R&S®RT-ZI10C passive probe	R&S®RT-ZI10C-2	1333.1811.02
Set 4 $\times$ R&S®RT-ZI10C passive probe	R&S®RT-ZI10C-4	1333.1328.02
20 kHz, AC/DC, 0.01 V/A and 0.001 V/A, $\pm$ 200 A and $\pm$ 2000 A	R&S®RT-ZC02	1333.0850.02
100 kHz, AC/DC, 0.1 V/A, 30 A	R&S®RT-ZC03	1333.0844.02
Accessory Replacement Set for R&S®RT-ZI10/R&S®RT-ZI11	R&S®RT-ZA20	1326.1978.02
Accessory Extension Set for R&S®RT-ZI10/R&S®RT-ZI11	R&S®RT-ZA21	1326.1984.02
Safety Test Leads, red and black, silicone, 600 V CAT IV	R&S®RT-ZA22	1326.0988.02
PT100 Temperature Probe	R&S®RT-ZA12	1333.0809.02
Choose your accessories		
Soft Carrying Bag	R&S®HA-Z220	1309.6175.00
Ethernet Cable, length: 2 m, crossover	R&S®HA-Z210	1309.6152.00
USB Cable, length: 1.8 m, standard/mini USB connector	R&S®HA-Z211	1309.6169.00
Hard Shell Protective Carrying Case	R&S®RTH-Z4	1326.2774.02
Car Adapter	R&S®HA-Z302	1321.1340.02
Battery Charger for Lithium-Ion Battery	R&S®HA-Z303	1321.1328.02
Replacement Battery	R&S®HA-Z306	1321.1334.02
Spare Power Supply for R&S®RTH incl. power plugs for EU, GB, US	R&S®RT-ZA14	1326.2874.02

Preconfigured Two-Channel R&S® Scope Rider Packages



Package Name	Preconfigured 2-channel R&S®Scope Rider Package	Order No.	Package consists of		
			Type		Order No.
2-Channel R&S®ScopeRider Base Models					
RTH1002	60 MHz, 2 channels, CAT IV, DMM	1317.5000P02	RTH1002	60 MHz, 2 channels base model	1317.5000k02
RTH1012	100 MHz, 2 channels, CAT IV, DMM	1317.5000P12	RTH1002	60 MHz, 2 channels base model	1317.5000k02
			RTH-B221	100 MHz bandwidth upgrade for RTH1002	1325.9717.02
RTH1022	200 MHz, 2 channels, CAT IV, DMM	1317.5000P22	RTH1002	60 MHz, 2 channels base model	1317.5000k02
			RTH-B222	200 MHz bandwidth upgrade for RTH1002	1325.9723.02
RTH1032	350 MHz, 2 channels, CAT IV, DMM	1317.5000P32	RTH1002	60 MHz, 2 channels base model	1317.5000k02
			RTH-B223	350 MHz bandwidth upgrade for RTH1002	1325.9730.02
RTH1052	500 MHz, 2 channels, CAT IV, DMM	1317.5000P52	RTH1002	60 MHz, 2 channels base model	1317.5000k02
			RTH-B224	500 MHz bandwidth upgrade for RTH1002	1326.0571.02
2-Channel R&S®ScopeRider Mixed Signal Models					
RTH1002MSO	60 MHz, 2 channels, CAT IV, DMM, MSO	1317.5000P03	RTH1002	60 MHz, 2 channels base model	1317.5000k02
			RTH-B1	Mixed Signal (Logic analyzer) option	1325.9981.02
RTH1012MSO	100 MHz, 2 channels, CAT IV, DMM, MSO	1317.5000P13	RTH1002	60 MHz, 2 channels base model	1317.5000k02
			RTH-B221	100 MHz bandwidth upgrade for RTH1002	1325.9717.02
			RTH-B1	Mixed Signal (Logic analyzer) option	1325.9981.02
RTH1022MSO	200 MHz, 2 channels, CAT IV, DMM, MSO	1317.5000P23	RTH1002	60 MHz, 2 channels base model	1317.5000k02
			RTH-B222	200 MHz bandwidth upgrade for RTH1002	1325.9723.02
			RTH-B1	Mixed Signal (Logic analyzer) option	1325.9981.02
RTH1032MSO	350 MHz, 2 channels, CAT IV, DMM, MSO	1317.5000P33	RTH1002	60 MHz, 2 channels base model	1317.5000k02
			RTH-B223	350 MHz bandwidth upgrade for RTH1002	1325.9730.02
			RTH-B1	Mixed Signal (Logic analyzer) option	1325.9981.02
RTH1052MSO	500 MHz, 2 channels, CAT IV, DMM, MSO	1317.5000P53	RTH1002	60 MHz, 2 channels base model	1317.5000k02
			RTH-B224	500 MHz bandwidth upgrade for RTH1002	1326.0571.02
			RTH-B1	Mixed Signal (Logic analyzer) option	1325.9981.02


Oscilloscope portfolio



R&S® family	RTH1000	HMO1002	HMO1202	RTB2000	HMO3000
Vertical					
Bandwidth	60/100/200/350/500 MHz ¹⁾	50/70/100 MHz ¹⁾	100/200/300 MHz ¹⁾	70/100/200/300 MHz ¹⁾	300/400/500 MHz ¹⁾
Number of channels	2 plus DMM/4	2		2/4	2/4
V/div 1 MΩ	2 mV to 100 V	1 mV to 10 V		1 mV to 5 V	1 mV to 5 V
V/div 50 Ω	–	–	1 mV to 10 V	–	1 mV to 5 V
Horizontal					
Sampling rate	1.25 Gsample/s per channel (4-channel model); 2.5 Gsample/s per channel (2-channel model); 5 Gsample/s (all channels interleaved)	500 Msample/s per channel 1 Gsample/s (2 channels interleaved)	1 Gsample/s per channel 2 Gsample/s (2 channels interleaved)	1.25 Gsample/s per channel; 2.5 Gsample/s (2 channels interleaved)	2 Gsample/s per channel; 4 Gsample/s (2 channels interleaved)
Max. memory (per channel/1 channel active)	125 ksample (4-channel model); 250 ksample (2-channel model); 500 ksample	500 ksample; 1 Msample	1 Msample; 2 Msample	10 Msample; 20 Msample (160 Msample in segmented memory mode ²⁾)	4 Msample; 8 Msample
Segmented memory	option	–		option	option
Acquisition rate	50 000 waveforms/s	10 000 waveforms/s		50 000 waveforms/s	5000 waveforms/s (200 000 waveforms/s in segmented memory mode ²⁾)
Trigger					
Options	advanced, digital trigger (14 trigger types) ²⁾	elementary (5 trigger types)		basic (6 trigger types)	basic (9 trigger types)
Mixed signal option					
No. of digital channels ¹⁾	8			16	16
Sampling rate of digital channels	1.25 Gsample/s	500 Msample/s	1 Gsample/s	1.25 Gsample/s	1 Gsample/s
Max. memory of digital channels	125 ksample	500 ksample	1 Msample	10 Msample	2 Msample
Analysis					
Cursor meas. types	3	11		13	12
Stand. meas. functions	33	31			
Mask test	elementary (tolerance mask around the signal)				
Mathematics	elementary		basic (math on math)	elementary	
Serial protocols triggering and decoding ¹⁾	I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN/LIN				
Display functions	data logger	–		–	–
Applications ¹⁾	high resolution frequency counter, advanced spectrum analysis, harmonics analysis	–		–	–
Compliance testing ¹⁾	–	–		–	–
Display and operation					
Size and resolution	7", color, 800 × 480 pixel	6.5", color, 640 × 480 pixel		10.1", color, 1280 × 800 pixel	6.5", color, 640 × 480 pixel
Operation	optimized for touchscreen operation, parallel button operation	optimized for fast button operation		optimized for touchscreen operation, parallel button operation	optimized for fast button operation
General data					
Size in mm (W × H × D)	201 × 293 × 74	285 × 175 × 140		390 × 220 × 152	285 × 175 × 220
Weight in kg	2.4	2.5		2.5	3.6
Battery	lithium-ion, > 4 h	–		–	–

¹⁾ Upgradeable.

²⁾ Requires an option.



RTM2000	RTE1000	RTO2000
200/350/500 MHz/1 GHz ¹⁾	200/350/500 MHz/1/1.5/2 GHz ¹⁾	600 MHz/1/2/3/4/6 GHz ¹⁾
2/4	2/4	2/4 (only 4 channels in 4 GHz and 6 GHz model)
1 mV to 10 V	500 μ V to 10 V	1 mV to 10 V (500 μ V to 10 V) ²⁾
1 mV to 2 V	500 μ V to 5 V	1 mV to 1 V (500 μ V to 1 V) ²⁾
2.5 Gsample/s per channel; 5 Gsample/s (2 channels interleaved)	5 Gsample/s per channel	10 Gsample/s per channel; 20 Gsample/s (2 channels interleaved in 4 GHz and 6 GHz model)
10 Msample; 20 Msample (460 Msample in segmented memory mode ²⁾)	standard: 10 Msample/40 Msample; max. upgrade: 50 Msample/200 Msample	standard: 50 Msample/200 Msample; max. upgrade: 1 Gsample/2 Gsample
option	standard	standard
12 500 waveforms/s (200 000 waveforms/s in segmented memory mode ²⁾)	1 000 000 waveforms/s (2 000 000 waveforms/s in ultra-segmented memory mode)	1 000 000 waveforms/s (3 000 000 waveforms/s in ultra-segmented memory mode)
basic (7 trigger types)	advanced, digital trigger (13 trigger types)	advanced, digital trigger (14 trigger types), zone trigger ²⁾
16	16	16
2.5 Gsample/s	5 Gsample/s	5 Gsample/s
10 Msample; 20 Msample	100 Msample	200 Msample
14	3	3
31	47	47
elementary (tolerance mask around the signal)	advanced (freely configurable, hardware-based)	
basic (math on math)	advanced (formula editor)	advanced (formula editor)
I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN/LIN, I ² S, MIL-STD-1553, ARINC 429	I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN/LIN, I ² S, MIL-STD-1553, ARINC 429, FlexRay™, CAN FD, USB 2.0/HSIC, Ethernet, Manchester, NRZ, SENT, SpaceWire, CXPI, Broad-R Reach®	I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN/LIN, I ² S, MIL-STD-1553, ARINC 429, FlexRay™, CAN FD, USB 2.0/HSIC, Ethernet, Manchester, NRZ, SENT, SpaceWire, CXPI, Broad-R Reach®, MIPI RFFE, MDIO, 8b 10b, MIPI D-PHY, MIPI M-PHY, MIPI M-PHY/UniPro, serial pattern trigger
track ²⁾	histogram, trend, track ²⁾	
power, digital voltmeter (DVM), spectrum analysis and spectrogram	R&S®RTM applications + 16-bit high definition, advanced spectrum analysis and spectrogram	R&S®RTE applications + jitter, clock data recovery, I/Q data, RF analysis
–	–	various options available, for details see data sheet (PD 3607.2684.22)
8.4", color, 1024 × 768 pixel	10.4", color, 1024 × 768 pixel	12.1", color, 1280 × 800 pixel
optimized for fast button operation	optimized for touchscreen operation, parallel button operation	
403 × 189 × 142	427 × 249 × 204	427 × 249 × 204
4.9	8.6	9.6
–	–	–

Preconfigured Four-Channel R&S®Scope Rider Packages



Package Name	Preconfigured 4-channel R&S®Scope Rider Package	Order No.	Package consists of		
			Type		Order No.
4-Channel R&S®Scope Rider Base Models					
RTH1004	60 MHz, 4 channels, CAT IV	1317.5000P04	RTH1004	60 MHz, 4 channels base model	1317.5000k04
RTH1014	100 MHz, 4 channels, CAT IV	1317.5000P14	RTH1004	60 MHz, 4 channels base model	1317.5000k04
			RTH-B241	100 MHz bandwidth upgrade for RTH1004	1326.0588.02
RTH1024	200 MHz, 4 channels, CAT IV	1317.5000P24	RTH1004	60 MHz, 4 channels base model	1317.5000k04
			RTH-B242	200 MHz bandwidth upgrade for RTH1004	1326.0594.02
RTH1034	350 MHz, 4 channels, CAT IV	1317.5000P34	RTH1004	60 MHz, 4 channels base model	1317.5000k04
			RTH-B243	350 MHz bandwidth upgrade for RTH1004	1326.0607.02
RTH1054	500 MHz, 4 channels, CAT IV	1317.5000P54	RTH1004	60 MHz, 4 channels base model	1317.5000k04
			RTH-B244	500 MHz bandwidth upgrade for RTH1004	1326.0613.02
4-Channel R&S®Scope Rider Mixed Signal Models					
RTH1004MSO	60 MHz, 4 channels, CAT IV, MSO	1317.5000P05	RTH1004	60 MHz, 4 channels base model	1317.5000k04
			RTH-B1	Mixed Signal (Logic analyzer) option	1325.9981.02
RTH1014MSO	100 MHz, 4 channels, CAT IV, MSO	1317.5000P15	RTH1004	60 MHz, 4 channels base model	1317.5000k04
			RTH-B241	100 MHz bandwidth upgrade for RTH1004	1326.0588.02
			RTH-B1	Mixed Signal (Logic analyzer) option	1325.9981.02
RTH1024MSO	200 MHz, 4 channels, CAT IV, MSO	1317.5000P25	RTH1004	60 MHz, 4 channels base model	1317.5000k04
			RTH-B242	200 MHz bandwidth upgrade for RTH1004	1326.0594.02
			RTH-B1	Mixed Signal (Logic analyzer) option	1325.9981.02
RTH1034MSO	350 MHz, 4 channels, CAT IV, MSO	1317.5000P35	RTH1004	60 MHz, 4 channels base model	1317.5000k04
			RTH-B243	350 MHz bandwidth upgrade for RTH1004	1326.0607.02
			RTH-B1	Mixed Signal (Logic analyzer) option	1325.9981.02
RTH1054MSO	500 MHz, 4 channels, CAT IV, MSO	1317.5000P55	RTH1004	60 MHz, 4 channels base model	1317.5000k04
			RTH-B244	500 MHz bandwidth upgrade for RTH1004	1326.0613.02
			RTH-B1	Mixed Signal (Logic analyzer) option	1325.9981.02

Service that adds value

- ▮ Worldwide
- ▮ Local and personalized
- ▮ Customized and flexible
- ▮ Uncompromising quality
- ▮ Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

Sustainable product design

- ▮ Environmental compatibility and eco-footprint
- ▮ Energy efficiency and low emissions
- ▮ Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Rohde & Schwarz training

www.training.rohde-schwarz.com

Regional contact

- ▮ Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- ▮ North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- ▮ Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- ▮ Asia Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- ▮ China | +86 800 810 82 28 | +86 400 650 58 96
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 3607.0517.62 | Version 07.01 | September 2017 (sk)

R&S®ScopeRider Handheld digital oscilloscope

Data without tolerance limits is not binding | Subject to change

© 2015 - 2017 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



3607051762